



Display cases
Display trolleys
Buffets and drop-in units



HEATED DISPLAY CASES _____ 40



REFRIGERATED DISPLAY CASES _____ 41



REFRIGERATED TROLLEYS _____ 42



REFRIGERATED SELF-SERVICE BUFFET TROLLEYS _____ 46



HEATED SELF-SERVICE BUFFET TROLLEYS _____ 50



MIXED HOT/COLD SELF-SERVICE BUFFET TROLLEYS _____ 56



DROP-IN UNITS _____ 62


HEATED DISPLAY CASES

- Fully stainless steel sheet construction, insulated with injected high density expanded polyurethane
- 180° opening tempered glass doors on 2 sides with no sharp edges and removable PVC door seals for easy cleaning
- Snap-closing hinges
- Stainless steel tube side pushing handles with PVC brackets
- Ventilated heating, power 2000W
- Control panel with digital thermostat-thermometer and ON/OFF switch with warning light

- Mains supply: 230V, 50Hz (60 Hz upon request), single-phase
- 3-mt long coiled power cable
- Swivel castors \varnothing 12.5 cm, 2 with brake

INTERNAL OPTIONS:


- Rack with 27 grills spaced 4 cm for 65x65 cm grills (standard model supplied with 15 grills spaced 8 cm)
- OR:
- Plate holder (88 plates capacity)



Art. 3360GS



Art. 3360PS-88

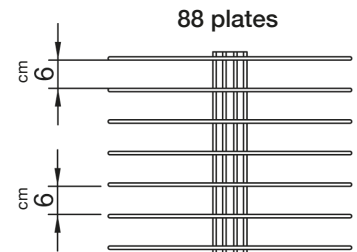

Article	Supports	Power	Max dim. cm
3360GS	15 Grills	2000W	83x77x190 h

Optional	Description
A0054	65x65 cm Grill


Article	Plate \varnothing cm	Supports	Plate N.	Power	Max dim. cm
3360PS-88	18÷24	Column	88	200W	88x77x190 h
3361PS-88	24÷31		88		

- Fully stainless steel sheet construction, insulated with injected high density expanded polyurethane
- Stainless steel watertight deep base with drain hole
- 180° opening tempered glass doors on 2 sides with no sharp edges and removable PVC door seals for easy cleaning
- Snap-closing hinges
- Stainless steel tube side pushing handles with PVC brackets
- Control panel with digital thermostat-thermometer and ON/OFF switch with warning light
- Mains supply: 230V, 50 Hz (60 Hz upon request), single-phase

- Static refrigeration +4°C +10°C
- 3-mt long coiled power cable
- Swivel castors ø 12.5 cm, 2 with brake

INTERNAL OPTIONS:



- Rack with 27 grills spaced 4 cm for 65x65 cm grills (standard model supplied with 15 grills spaced 8 cm)
- OR:
- Plate holder (88 plates capacity)



Art. 3370GS



Art. 3370PS-88

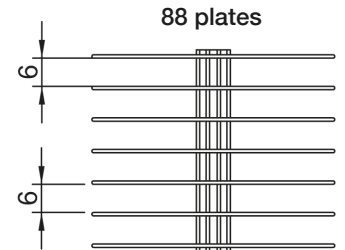

88 plates

Article	Supports	Power	Max dim. cm
3370GS	15 Grills	1200W	83x77x190 h

Optional	Description
A0055	65x65 cm Grill

Article	Plate Ø cm	Supports	Plate N.	Power	Max dim. cm
3370PS-88	18÷24	Column	88	1200W	88x77x190 h
3371PS-88	24÷31		88		

REFRIGERATED TROLLEYS FOR SWEETS AND CHEESE


- Solid wood frame with plywood panels and shelf
- Front opening plexiglass dome
- Glass shelf
- Static refrigeration +4°C +10°C
- Back panel and perforated false bottom
- Condensation drain at the base of the well (drain tap available on request)

- 3-Compartment cutlery drawer and sliding plate support
- Control panel with digital thermostat-thermometer and ON/OFF switch with warning light
- Mains supply: 230V, 50 Hz (60 Hz upon request), single-phase
- Swivel castors, ø 10 cm

Cherry wood



Wengé



Art. 6670-18W

Cutlery drawer




Sliding plate support





Article	Finish	Power	Max. dim. cm
6670-18	Cherry wood	130W	108x61x112 h
6670-18W	Wengé		108x61x112 h

Optional	Description	Suitable for
F	1 Set with 2 braked castors	All articles
E	2 Set with 4 resilient castors, 2 with brake	
A156	- Drain tap	
A0039	3 Pushing handle	



- Plexiglass semi-cylindrical dome opening on both sides
- Plywood panels and shelf
- AISI 304 stainless steel legs, brushed finish
- For BLACK finish: structure in water-repellent MDF with transparent coating
- AISI 304 stainless steel 19 cm-deep well for up to 15 cm-deep GN pans (not included)
- Condensation drain hole at the

- base of the well (drain tap available on request) **Note: the drain tap is necessary for fish displaying**
- Control panel with digital thermostat-thermometer and ON/OFF switch with warning light
- Mains supply: 230V, 50 Hz (60 Hz upon request), single-phase
- Static refrigeration +4°C +10°C
- Swivel castors ø 12.5 cm, 2 with brake



RAL Matt lacquering. Please indicate the RAL code of the chosen colour.




Art. 6930.3W + A20(x3)

Optional Gastronorms: see pp. 122-123

Note: when ordering one single front shelf, it is mounted on the opposite side to the operator one, unless otherwise specified.

Article	Finish	GN	Power	Max dim. cm	Optional	Front shelf
6930.2R	Oak	2x1/1	190W	80x68x120 h	A122R	1 drop-down shelf with tray slide
6930.2W	Wengé				A122W	
6930.2N	Black				A122N	
6930.2RAL	RAL				A122RAL	
6930.3R	Oak	3x1/1	350W	113x68x120 h	A123R	1 drop-down shelf with tray slide
6930.3W	Wengé				A123W	
6930.3N	Black				A123N	
6930.3RAL	RAL				A123RAL	
6930.4R	Oak	4x1/1	450W	161x68x120 h	A124R	1 drop-down shelf with tray slide
6930.4W	Wengé				A124W	
6930.4N	Black				A124N	
6930.4RAL	RAL				A124RAL	




Optional	Description	Suitable for
A156	Drain tap (necessary for fish displaying)	All articles
Accessories	Description	Suitable for
A10	1 1/1 GN Flat	All articles
A20	2 1/1 GN Perforated	
LED	- Well lighting	

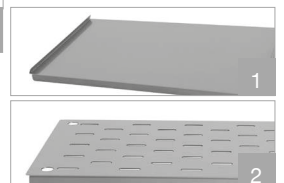

SELF-SERVICE BUFFET TROLLEYS OVERVIEW

GENERAL FEATURES

- Stainless overhead gantry
- Fixed plexiglass sneeze guard OR height-adjustable tempered glass sneeze guard
- Plywood panels, shelf (and doors in the cupboard version)
- AISI 304 stainless steel legs, brushed finish
- AISI 304 stainless steel 19 cm-deep well for up to 15 cm-deep GN pans (not included)
- Swivel castors ø 12.5 cm, 2 with brake

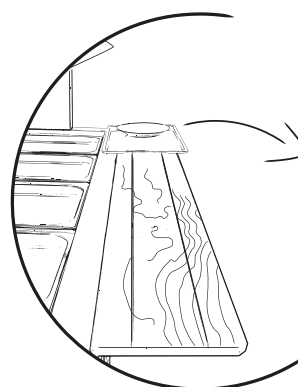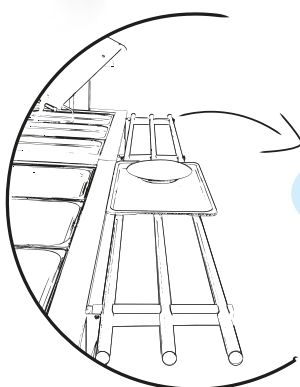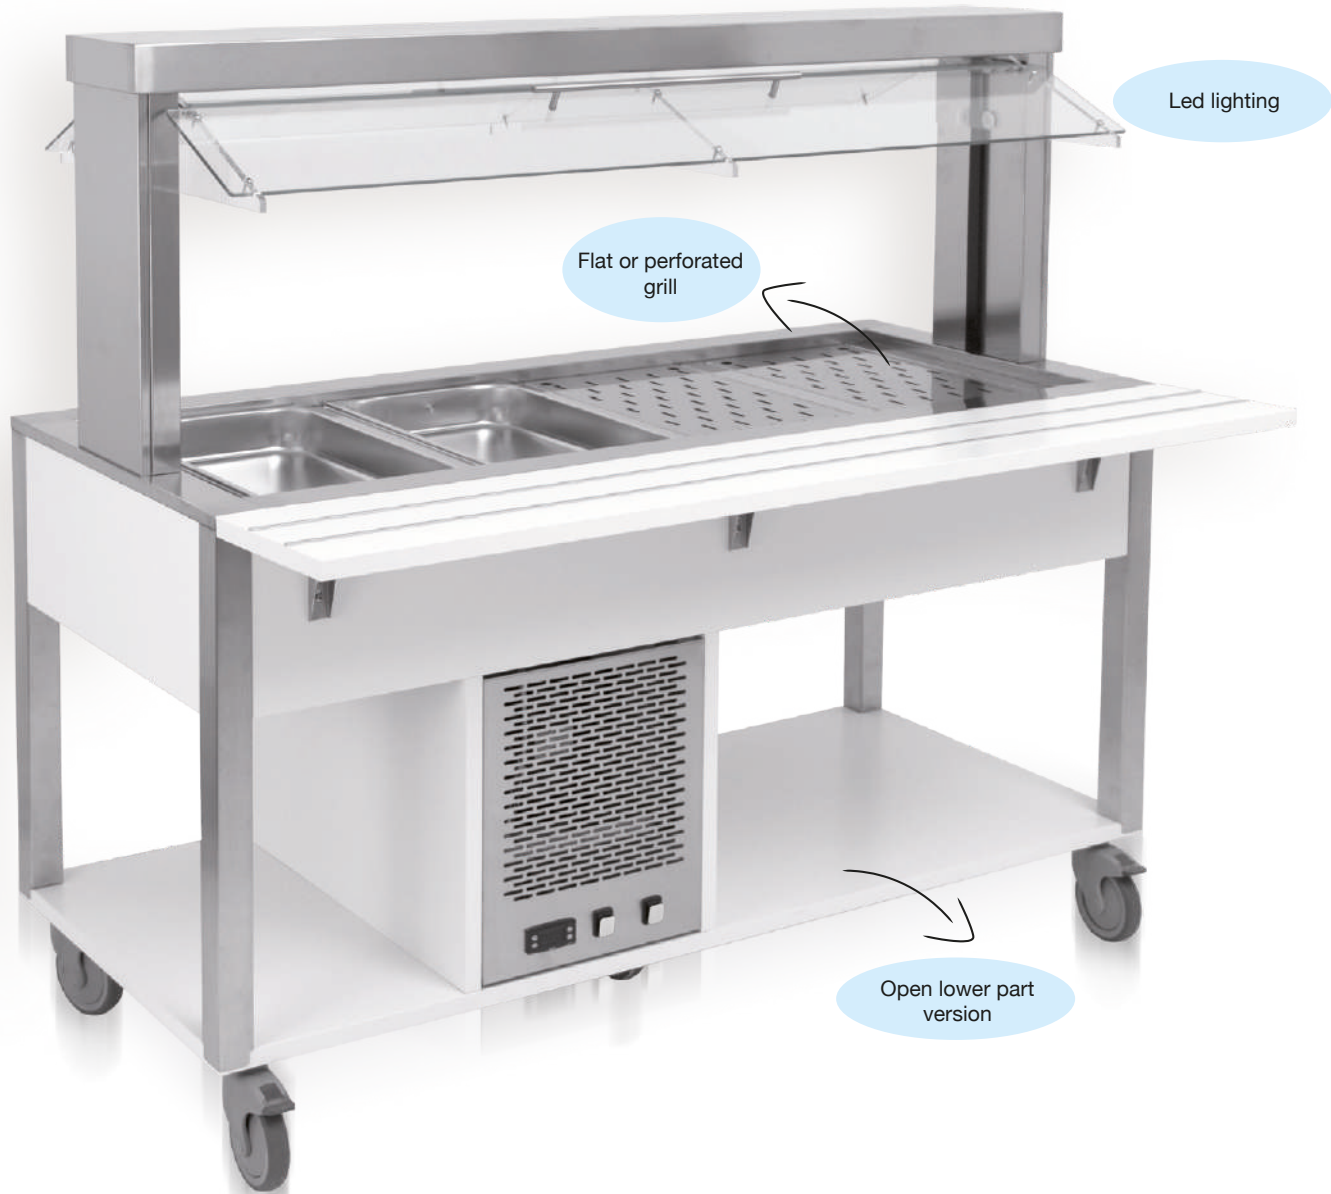

SELF-SERVICE BUFFET TROLLEYS OVERVIEW




Cupboard version

Infrared lamps

Swivel castors
ø 12.5 cm
2 with brake


Fixed
sneeze guard

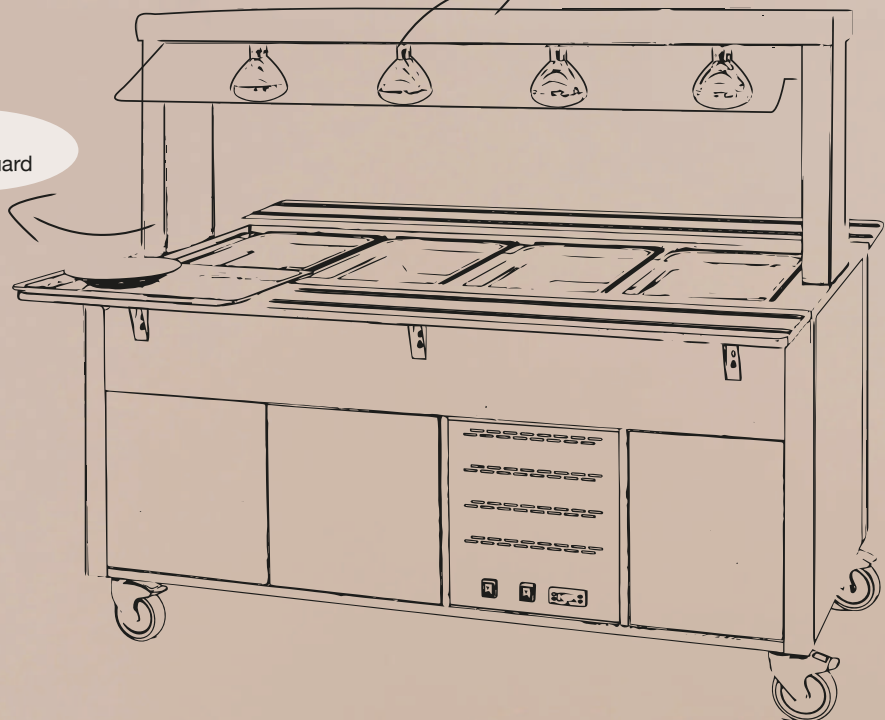

REFRIGERATED SELF-SERVICE BUFFET TROLLEYS - FIXED SNEEZE GUARD - LED LIGHTING

- Stainless steel overhead gantry with led lighting
- Fixed plexiglass sneeze guard
- Plywood panels, shelf (and doors in the cupboard version)
- AISI 304 stainless steel legs, brushed finish
- For BLACK finish: structure in water-repellent MDF with transparent coating
- AISI 304 stainless steel 19 cm-deep well for up to 15 cm-deep GN pans (not included)

- Condensate drain at the base of the well (drain tap available on request)
Note: the drain tap is necessary for fish displaying
- Control panel with digital thermostat-thermometer and ON/OFF switch with warning light
- Mains supply: 230V, 50 Hz (60 Hz upon request), single-phase
- Static refrigeration +4°C +10°C
- 3m long coiled cable, Schuko plug
- Swivel castors ø 12.5 cm, 2 with brake



RAL Matt lacquering. Please indicate the RAL code of the chosen colour.



Optional Gastronorms: see pp. 122-123

Art. 6900.4-W + A124W(x2) + A156 + A20(x4)

OPEN LOWER PART VERSION

Note: when ordering one single front shelf, it is mounted on the opposite side to the operator one, unless otherwise specified.

Article	Finish	Typology	GN	Power	Max dim. cm	Optional	Lateral shelf	Optional	Front shelf
6900.2-R	Oak	OPEN LOWER PART	2x1/1	200W	80x68x144 h	A120R	1 fixed with tray slide	A122R	1 drop-down with tray slide
6900.2-W	Wengé					A120W		A122W	
6900.2-N	Black					A120N		A122N	
6900.2-RAL	RAL					A120RAL		A122RAL	
6900.3-R	Oak	OPEN LOWER PART	3x1/1	360W	113x68x144 h	A120R	1 fixed with tray slide	A123R	1 drop-down with tray slide
6900.3-W	Wengé					A120W		A123W	
6900.3-N	Black					A120N		A123N	
6900.3-RAL	RAL					A120RAL		A123RAL	
6900.4-R	Oak	OPEN LOWER PART	4x1/1	550W	161x68x144 h	A120R	1 fixed with tray slide	A124R	1 drop-down with tray slide
6900.4-W	Wengé					A120W		A124W	
6900.4-N	Black					A120N		A124N	
6900.4-RAL	RAL					A120RAL		A124RAL	
6900.5-R	Oak	OPEN LOWER PART	5x1/1	480W	193x68x144 h	A120R	1 fixed with tray slide	A125R	1 drop-down with tray slide
6900.5-W	Wengé					A120W		A125W	
6900.5-N	Black					A120N		A125N	
6900.5-RAL	RAL					A120RAL		A125RAL	
6900.6-R	Oak	OPEN LOWER PART	6x1/1	690W	226x68x144 h	A120R	1 fixed with tray slide	A126R	1 drop-down with tray slide
6900.6-W	Wengé					A120W		A126W	
6900.6-N	Black					A120N		A126N	
6900.6-RAL	RAL					A120RAL		A126RAL	

REFRIGERATED SELF-SERVICE BUFFET TROLLEYS - FIXED SNEEZE GUARD - LED LIGHTING






Art. 6900CPB.4-N + A124N(x2) +A10(x3) + A20(x1)

CUPBOARD VERSION: with back panel, side panels and doors

Note: when ordering one single front shelf, it is mounted on the opposite side to the operator one, unless otherwise specified.

Article	Finish	Typology	GN	Power	Max dim. cm	Optional	Lateral shelf	Optional	Front shelf
6900CPB.2-R	Oak	CUPBOARD	2x1/1	200W	80x68x144 h	A120R	1 fixed with tray slide	A122R	1 drop-down with tray slide
6900CPB.2-W	Wengé					A120W		A122W	
6900CPB.2-N	Black					A120N		A122N	
6900CPB.2-RAL	RAL					A120RAL		A122RAL	
6900CPB.3-R	Oak	CUPBOARD	3x1/1	360W	113x68x144 h	A120R	1 fixed with tray slide	A123R	1 drop-down with tray slide
6900CPB.3-W	Wengé					A120W		A123W	
6900CPB.3-N	Black					A120N		A123N	
6900CPB.3-RAL	RAL					A120RAL		A123RAL	
6900CPB.4-R	Oak	CUPBOARD	4x1/1	550W	161x68x144 h	A120R	1 fixed with tray slide	A124R	1 drop-down with tray slide
6900CPB.4-W	Wengé					A120W		A124W	
6900CPB.4-N	Black					A120N		A124N	
6900CPB.4-RAL	RAL					A120RAL		A124RAL	
6900CPB.5-R	Oak	CUPBOARD	5x1/1	480W	193x68x144 h	A120R	1 fixed with tray slide	A125R	1 drop-down with tray slide
6900CPB.5-W	Wengé					A120W		A125W	
6900CPB.5-N	Black					A120N		A125N	
6900CPB.5-RAL	RAL					A120RAL		A125RAL	
6900CPB.6-R	Oak	CUPBOARD	6x1/1	690W	226x68x144 h	A120R	1 fixed with tray slide	A126R	1 drop-down with tray slide
6900CPB.6-W	Wengé					A120W		A126W	
6900CPB.6-N	Black					A120N		A126N	
6900CPB.6-RAL	RAL					A120RAL		A126RAL	


OPTIONAL ITEMS AND ACCESSORIES SUITABLE FOR BOTH VERSIONS

Optional	Description	GN	
A142	Front drop-down stainless steel rodded tray slide	2x1/1	
A143		3x1/1	
A144		4x1/1	
A145		5x1/1	
A146		6x1/1	
Optional	Description	Suitable for	
A156	Drain tap (necessary for fish displaying)	All articles	
Accessories	Description	Suitable for	
A10	1/1 GN Flat	All articles	
A20	1/1 GN Perforated		

REFRIGERATED SELF-SERVICE BUFFET TROLLEYS - ADJUSTABLE SNEEZE GUARD - LED LIGHTING

- Stainless steel overhead gantry with led lighting
- Height-adjustable tempered glass sneeze guard
- Plywood panels, shelf (and doors in the cupboard version)
- AISI 304 stainless steel legs, brushed finish
- For BLACK finish: structure in water-repellent MDF with transparent coating
- AISI 304 stainless steel 19 cm-deep well for up to 15 cm-deep GN pans (not included)

- Condensate drain at the base of the well (drain tap available on request)
Note: the drain tap is necessary for fish displaying
- Control panel with digital thermostat-thermometer and ON/OFF switch with warning light
- Mains supply: 230V, 50 Hz (60 Hz upon request), single-phase
- Static refrigeration +4°C +10°C
- 3m long coiled cable, Schuko plug
- Swivel castors ø 12.5 cm, 2 with brake



Matt lacquering. Please indicate the RAL code of the chosen colour.



Optional Gastronorms see pp. 122-123

Art. 6900.4M-R + A124R(x2) + pans

OPEN LOWER PART VERSION

Article	Finish	Typology	GN	Power	Max dim. cm	Optional	Lateral shelf	Optional	Front shelf
6900.2M-R	Oak	OPEN LOWER PART	2x1/1	200W	80x68x144 h	A120R	1 fixed with tray slide	A122R	1 drop-down with tray slide
6900.2M-W	Wengé					A120W		A122W	
6900.2M-N	Black					A120N		A122N	
6900.2M-RAL	RAL					A120RAL		A122RAL	
6900.3M-R	Oak	OPEN LOWER PART	3x1/1	360W	113x68x144 h	A120R	1 fixed with tray slide	A123R	1 drop-down with tray slide
6900.3M-W	Wengé					A120W		A123W	
6900.3M-N	Black					A120N		A123N	
6900.3M-RAL	RAL					A120RAL		A123RAL	
6900.4M-R	Oak	OPEN LOWER PART	4x1/1	550W	161x68x144 h	A120R	1 fixed with tray slide	A124R	1 drop-down with tray slide
6900.4M-W	Wengé					A120W		A124W	
6900.4M-N	Black					A120N		A124N	
6900.4M-RAL	RAL					A120RAL		A124RAL	
6900.5M-R	Oak	OPEN LOWER PART	5x1/1	480W	193x68x144 h	A120R	1 fixed with tray slide	A125R	1 drop-down with tray slide
6900.5M-W	Wengé					A120W		A125W	
6900.5M-N	Black					A120N		A125N	
6900.5M-RAL	RAL					A120RAL		A125RAL	
6900.6M-R	Oak	OPEN LOWER PART	6x1/1	690W	226x68x144 h	A120R	1 fixed with tray slide	A126R	1 drop-down with tray slide
6900.6M-W	Wengé					A120W		A126W	
6900.6M-N	Black					A120N		A126N	
6900.6M-RAL	RAL					A120RAL		A126RAL	

Note: when ordering one single front shelf, it is mounted on the opposite side to the operator one, unless otherwise specified.






Art. 6900CPB.3M-N + A123N(x2) + A120N(x2) + pans

CUPBOARD VERSION: with back panel, side panels and doors

Note: when ordering one single front shelf, it is mounted on the opposite side to the operator one, unless otherwise specified.


Article	Finish	Typology	GN	Power	Max dim. cm	Optional	Lateral shelf	Optional	Front shelf
6900CPB.2M-R	Oak	CUPBOARD	2x1/1	200W	80x68x144 h	A120R	1 fixed with tray slide	A122R	1 drop-down with tray slide
6900CPB.2M-W	Wengé					A120W		A122W	
6900CPB.2M-N	Black					A120N		A122N	
6900CPB.2M-RAL	RAL					A120RAL		A122RAL	
6900CPB.3M-R	Oak	CUPBOARD	3x1/1	360W	113x68x144 h	A120R	1 fixed with tray slide	A123R	1 drop-down with tray slide
6900CPB.3M-W	Wengé					A120W		A123W	
6900CPB.3M-N	Black					A120N		A123N	
6900CPB.3M-RAL	RAL					A120RAL		A123RAL	
6900CPB.4M-R	Oak	CUPBOARD	4x1/1	550W	161x68x144 h	A120R	1 fixed with tray slide	A124R	1 drop-down with tray slide
6900CPB.4M-W	Wengé					A120W		A124W	
6900CPB.4M-N	Black					A120N		A124N	
6900CPB.4M-RAL	RAL					A120RAL		A124RAL	
6900CPB.5M-R	Oak	CUPBOARD	5x1/1	480W	193x68x144 h	A120R	1 fixed with tray slide	A125R	1 drop-down with tray slide
6900CPB.5M-W	Wengé					A120W		A125W	
6900CPB.5M-N	Black					A120N		A125N	
6900CPB.5M-RAL	RAL					A120RAL		A125RAL	
6900CPB.6M-R	Oak	CUPBOARD	6x1/1	690W	226x68x144 h	A120R	1 fixed with tray slide	A126R	1 drop-down with tray slide
6900CPB.6M-W	Wengé					A120W		A126W	
6900CPB.6M-N	Black					A120N		A126N	
6900CPB.6M-RAL	RAL					A120RAL		A126RAL	

OPTIONAL ITEMS AND ACCESSORIES SUITABLE FOR BOTH VERSIONS

Optional	Description	GN	
A142	Front drop-down stainless steel rodded tray slide	2x1/1	
A143		3x1/1	
A144		4x1/1	
A145		5x1/1	
A146		6x1/1	
Optional	Description	Suitable for	
A156	Drain tap (necessary for fish displaying)	All articles	
Accessories	Description	Suitable for	
A10	1/1 GN Flat	All articles	
A20	1/1 GN Perforated		

HEATED SELF-SERVICE BUFFET TROLLEYS - FIXED SNEEZE GUARD - LED LIGHTING

- Stainless steel overhead gantry with led lighting
- Fixed plexiglass sneeze guard
- Plywood panels, shelf (and doors in the cupboard version)
- AISI 304 stainless steel legs, brushed finish
- For BLACK finish: structure in water-repellent MDF with transparent coating
- AISI 304 stainless steel 19 cm-deep well for up to 15 cm-deep GN pans (not included)
- Bain-marie drain plug
- Control panel with digital thermostat-thermometer and ON/OFF switch with warning light
- Mains supply: 230V, 50/60 Hz, single-phase
- Bain-marie heating with heating element outside the well
- 3m long coiled cable, Schuko plug. For powers equal to or greater than 3000W, the cable is supplied free without plug. For the plug, see optional item T200
- Swivel castors ø 12.5 cm, 2 with brake

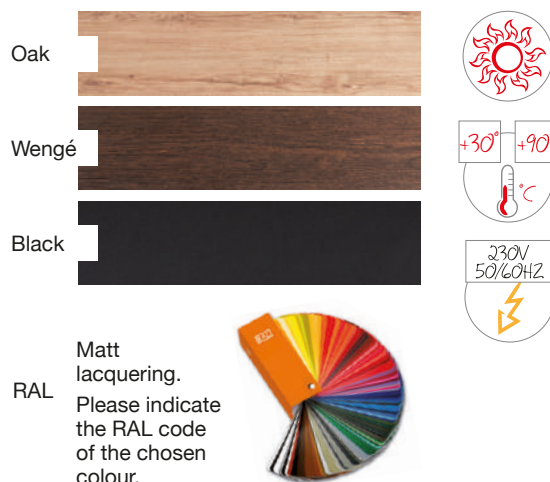

Art. 6910.4-RAL + A124RAL(x2) + pans

Optional Gastronorms: see pp. 122-123

OPEN LOWER PART VERSION

Article	Finish	Typology	GN	Power	Max dim. cm	Optional	Lateral shelf	Optional	Front shelf
6910.2-R	Oak	OPEN LOWER PART	2x1/1	1200W	80x68x144 h	A120R	1 fixed with tray slide	A122R	1 drop-down with tray slide
6910.2-W	Wengé					A120W		A122W	
6910.2-N	Black					A120N		A122N	
6910.2-RAL	RAL					A120RAL		A122RAL	
6910.3-R	Oak	OPEN LOWER PART	3x1/1	1500W	113x68x144 h	A120R	1 fixed with tray slide	A123R	1 drop-down with tray slide
6910.3-W	Wengé					A120W		A123W	
6910.3-N	Black					A120N		A123N	
6910.3-RAL	RAL					A120RAL		A123RAL	
6910.4-R	Oak	OPEN LOWER PART	4x1/1	2400W	161x68x144 h	A120R	1 fixed with tray slide	A124R	1 drop-down with tray slide
6910.4-W	Wengé					A120W		A124W	
6910.4-N	Black					A120N		A124N	
6910.4-RAL	RAL					A120RAL		A124RAL	
6910.5-R	Oak	OPEN LOWER PART	5x1/1	3000W	193x68x144 h	A120R	1 fixed with tray slide	A125R	1 drop-down with tray slide
6910.5-W	Wengé					A120W		A125W	
6910.5-N	Black					A120N		A125N	
6910.5-RAL	RAL					A120RAL		A125RAL	
6910.6-R	Oak	OPEN LOWER PART	6x1/1	3600W	226x68x144 h	A120R	1 fixed with tray slide	A126R	1 drop-down with tray slide
6910.6-W	Wengé					A120W		A126W	
6910.6-N	Black					A120N		A126N	
6910.6-RAL	RAL					A120RAL		A126RAL	

Note: when ordering one single front shelf, it is mounted on the opposite side to the operator one, unless otherwise specified.

HEATED SELF-SERVICE BUFFET TROLLEYS - FIXED SNEEZE GUARD - LED LIGHTING



Art. 6910CPB.4-RAL + A124RAL(x2) + pans





CUPBOARD VERSION: with back panel, side panels and doors

Note: when ordering one single front shelf, it is mounted on the opposite side to the operator one, unless otherwise specified.

Article	Finish	Typology	GN	Power	Max dim. cm	Optional	Lateral shelf	Optional	Front shelf
6910CPB.2-R	Oak	CUPBOARD	2x1/1	1200W	80x68x144 h	A120R	1 fixed with tray slide	A122R	1 drop-down with tray slide
6910CPB.2-W	Wengé					A120W		A122W	
6910CPB.2-N	Black					A120N		A122N	
6910CPB.2-RAL	RAL					A120RAL		A122RAL	
6910CPB.3-R	Oak	CUPBOARD	3x1/1	1500W	113x68x144 h	A120R	1 fixed with tray slide	A123R	1 drop-down with tray slide
6910CPB.3-W	Wengé					A120W		A123W	
6910CPB.3-N	Black					A120N		A123N	
6910CPB.3-RAL	RAL					A120RAL		A123RAL	
6910CPB.4-R	Oak	CUPBOARD	4x1/1	2400W	161x68x144 h	A120R	1 fixed with tray slide	A124R	1 drop-down with tray slide
6910CPB.4-W	Wengé					A120W		A124W	
6910CPB.4-N	Black					A120N		A124N	
6910CPB.4-RAL	RAL					A120RAL		A124RAL	
6910CPB.5-R	Oak	CUPBOARD	5x1/1	3000W	193x68x144 h	A120R	1 fixed with tray slide	A125R	1 drop-down with tray slide
6910CPB.5-W	Wengé					A120W		A125W	
6910CPB.5-N	Black					A120N		A125N	
6910CPB.5-RAL	RAL					A120RAL		A125RAL	
6910CPB.6-R	Oak	CUPBOARD	6x1/1	3600W	226x68x144 h	A120R	1 fixed with tray slide	A126R	1 drop-down with tray slide
6910CPB.6-W	Wengé					A120W		A126W	
6910CPB.6-N	Black					A120N		A126N	
6910CPB.6-RAL	RAL					A120RAL		A126RAL	

OPTIONAL ITEMS AND ACCESSORIES SUITABLE FOR BOTH VERSIONS

Optional	Description	GN	
A142	Front drop-down stainless steel rodded tray slide	2x1/1	
A143		3x1/1	
A144		4x1/1	
A145		5x1/1	
A146		6x1/1	
Optional	Description	Suitable for	
A152	Mains supply 380V	All articles	
A154	Water loading from net, drain tap and overflow		
T200	Mobile plug 2P+E-6h/250V - 16 A - IP67 (IEC 309) - for powers up to 3450W		

Accessories	Description	Suitable for		
A10	1/1 GN Flat	All articles		
A20	1/1 GN Perforated			

HEATED SELF-SERVICE BUFFET TROLLEYS - FIXED SNEEZE GUARD - INFRARED LAMPS

- Stainless steel overhead gantry with upper heating set of infrared lamps
- Fixed plexiglass sneeze guard
- Plywood panels, shelf (and doors in the cupboard version)
- AISI 304 stainless steel legs, brushed finish
- For BLACK finish: structure in water-repellent MDF with transparent coating
- AISI 304 stainless steel 19 cm-deep well for up to 15 cm-deep GN pans (not included)

- Bain-marie drain plug
- Bain-marie heating with heating element outside the well
- Control panel with digital thermostat-thermometer and ON/OFF switch with warning light
- Mains supply: 230V, 50/60 Hz, single-phase
- 3m long coiled cable, Schuko plug. For powers equal to or greater than 3000W, the cable is supplied free without plug. For the plug, see optional item T200
- Swivel castors ø 12.5 cm, 2 with brake

Oak

Wengé

Black

RAL

Matt lacquering. Please indicate the RAL code of the chosen colour.



Optional Gastronorms: see pp. 122-123

Art. 6910.4L-W + A124W(x2) + A20(x2) + pans

OPEN LOWER PART VERSION

Note: when ordering one single front shelf, it is mounted on the opposite side to the operator one, unless otherwise specified.

Article	Finish	Typology	GN	Power	Max dim. cm	Optional	Lateral shelf	Optional	Front shelf
6910.2L-R	Oak	OPEN LOWER PART	2x1/1	1700W	80x68x144 h	A120R	1 fixed with tray slide	A122R	1 drop-down with tray slide
6910.2L-W	Wengé					A120W		A122W	
6910.2L-N	Black					A120N		A122N	
6910.2L-RAL	RAL					A120RAL		A122RAL	
6910.3L-R	Oak	OPEN LOWER PART	3x1/1	2250W	113x68x144 h	A120R	1 fixed with tray slide	A123R	1 drop-down with tray slide
6910.3L-W	Wengé					A120W		A123W	
6910.3L-N	Black					A120N		A123N	
6910.3L-RAL	RAL					A120RAL		A123RAL	
6910.4L-R	Oak	OPEN LOWER PART	4x1/1	3400W	161x68x144 h	A120R	1 fixed with tray slide	A124R	1 drop-down with tray slide
6910.4L-W	Wengé					A120W		A124W	
6910.4L-N	Black					A120N		A124N	
6910.4L-RAL	RAL					A120RAL		A124RAL	
6910.5L-R	Oak	OPEN LOWER PART	5x1/1	4250W	193x68x144 h	A120R	1 fixed with tray slide	A125R	1 drop-down with tray slide
6910.5L-W	Wengé					A120W		A125W	
6910.5L-N	Black					A120N		A125N	
6910.5L-RAL	RAL					A120RAL		A125RAL	
6910.6L-R	Oak	OPEN LOWER PART	6x1/1	5100W	226x68x144 h	A120R	1 fixed with tray slide	A126R	1 drop-down with tray slide
6910.6L-W	Wengé					A120W		A126W	
6910.6L-N	Black					A120N		A126N	
6910.6L-RAL	RAL					A120RAL		A126RAL	

HEATED SELF-SERVICE BUFFET TROLLEYS - FIXED SNEEZE GUARD - INFRARED LAMPS



Art. 6910CPB.4L-W + A124W(x2) + pans



CUPBOARD VERSION: with back panel, side panels and doors

Note: when ordering one single front shelf, it is mounted on the opposite side to the operator one, unless otherwise specified.

Article	Finish	Typology	GN	Power	Max dim. cm	Optional	Lateral shelf	Optional	Front shelf
6910CPB.2L-R	Oak	CUPBOARD	2x1/1	1700W	80x68x144 h	A120R	1 fixed with tray slide	A122R	1 drop-down with tray slide
6910CPB.2L-W	Wengé					A120W		A122W	
6910CPB.2L-N	Black					A120N		A122N	
6910CPB.2L-RAL	RAL					A120RAL		A122RAL	
6910CPB.3L-R	Oak	CUPBOARD	3x1/1	2250W	113x68x144 h	A120R	1 fixed with tray slide	A123R	1 drop-down with tray slide
6910CPB.3L-W	Wengé					A120W		A123W	
6910CPB.3L-N	Black					A120N		A123N	
6910CPB.3L-RAL	RAL					A120RAL		A123RAL	
6910CPB.4L-R	Oak	CUPBOARD	4x1/1	3400W	161x68x144 h	A120R	1 fixed with tray slide	A124R	1 drop-down with tray slide
6910CPB.4L-W	Wengé					A120W		A124W	
6910CPB.4L-N	Black					A120N		A124N	
6910CPB.4L-RAL	RAL					A120RAL		A124RAL	
6910CPB.5L-R	Oak	CUPBOARD	5x1/1	4250W	193x68x144 h	A120R	1 fixed with tray slide	A125R	1 drop-down with tray slide
6910CPB.5L-W	Wengé					A120W		A125W	
6910CPB.5L-N	Black					A120N		A125N	
6910CPB.5L-RAL	RAL					A120RAL		A125RAL	
6910CPB.6L-R	Oak	CUPBOARD	6x1/1	5100W	226x68x144 h	A120R	1 fixed with tray slide	A126R	1 drop-down with tray slide
6910CPB.6L-W	Wengé					A120W		A126W	
6910CPB.6L-N	Black					A120N		A126N	
6910CPB.6L-RAL	RAL					A120RAL		A126RAL	

OPTIONAL ITEMS AND ACCESSORIES SUITABLE FOR BOTH VERSIONS

Optional	Description	GN	Suitable for
A142	Front drop-down stainless steel rodded tray slide	2x1/1	1
A143		3x1/1	
A144		4x1/1	
A145		5x1/1	
A146		6x1/1	
Optional	Description	Suitable for	
LB	White lamps	All articles	1
A152	Mains supply 380V		
A154	Water loading from net, drain tap and overflow		
T200	Mobile plug 2P+E-6h/250V - 16 A - IP67 (IEC 309) - for powers up to 3450W		
Accessories	Description	Suitable for	
A10	1/1 GN Flat	All articles	2
A20	1/1 GN Perforated		

HEATED SELF-SERVICE BUFFET TROLLEYS - ADJUSTABLE SNEEZE GUARD - LED LIGHTING

- Stainless steel overhead gantry with led lighting
- Height-adjustable tempered glass sneeze guard
- Plywood panels, shelf (and doors in the cupboard version)
- AISI 304 stainless steel legs, brushed finish
- For BLACK finish: structure in water-repellent MDF with transparent coating
- AISI 304 stainless steel 19 cm-deep well for up to 15 cm-deep GN pans (not included)
- Bain-marie drain plug
- Bain-marie heating with heating element outside the well
- Control panel with digital thermostat-thermometer and ON/OFF switch with warning light
- Mains supply: 230V, 50/60 Hz, single-phase
- 3m long coiled cable, Schuko plug. For powers equal to or greater than 3000W, the cable is supplied free without plug. For the plug, see optional item T200
- Swivel castors ø 12.5 cm, 2 with brake

Oak

Wengé

Black

RAL

Matt lacquering. Please indicate the RAL code of the chosen colour.



ADJUSTABLE SNEEZE GUARD

Optional Gastronorms: see pp. 122-123

Art. 6910.4M-R + A124R(x2) + pans

OPEN LOWER PART VERSION

Note: when ordering one single front shelf, it is mounted on the opposite side to the operator one, unless otherwise specified.

Article	Finish	Typology	GN	Power	Max dim. cm	Optional	Lateral shelf	Optional	Front shelf
6910.2M-R	Oak	OPEN LOWER PART	2x1/1	1200W	80x68x144 h	A120R	1 fixed with tray slide	A122R	1 drop-down with tray slide
6910.2M-W	Wengé					A120W		A122W	
6910.2M-N	Black					A120N		A122N	
6910.2M-RAL	RAL					A120RAL		A122RAL	
6910.3M-R	Oak	OPEN LOWER PART	3x1/1	1500W	113x68x144 h	A120R	1 fixed with tray slide	A123R	1 drop-down with tray slide
6910.3M-W	Wengé					A120W		A123W	
6910.3M-N	Black					A120N		A123N	
6910.3M-RAL	RAL					A120RAL		A123RAL	
6910.4M-R	Oak	OPEN LOWER PART	4x1/1	2400W	161x68x144 h	A120R	1 fixed with tray slide	A124R	1 drop-down with tray slide
6910.4M-W	Wengé					A120W		A124W	
6910.4M-N	Black					A120N		A124N	
6910.4M-RAL	RAL					A120RAL		A124RAL	
6910.5M-R	Oak	OPEN LOWER PART	5x1/1	3000W	193x68x144 h	A120R	1 fixed with tray slide	A125R	1 drop-down with tray slide
6910.5M-W	Wengé					A120W		A125W	
6910.5M-N	Black					A120N		A125N	
6910.5M-RAL	RAL					A120RAL		A125RAL	
6910.6M-R	Oak	OPEN LOWER PART	6x1/1	3600W	226x68x144 h	A120R	1 fixed with tray slide	A126R	1 drop-down with tray slide
6910.6M-W	Wengé					A120W		A126W	
6910.6M-N	Black					A120N		A126N	
6910.6M-RAL	RAL					A120RAL		A126RAL	






Art. 6910CPB.4M-R + A124R(x2) + pans

CUPBOARD VERSION: with back panel, side panels and doors

Note: when ordering one single front shelf, it is mounted on the opposite side to the operator one, unless otherwise specified.


Article	Finish	Typology	GN	Power	Max dim. cm	Optional	Lateral shelf	Optional	Front shelf
6910CPB.2M-R	Oak	CUPBOARD	2x1/1	1200W	80x68x144 h	A120R	1 fixed with tray slide	A122R	1 drop-down with tray slide
6910CPB.2M-W	Wengé					A120W		A122W	
6910CPB.2M-N	Black					A120N		A122N	
6910CPB.2M-RAL	RAL					A120RAL		A122RAL	
6910CPB.3M-R	Oak	CUPBOARD	3x1/1	1500W	113x68x144 h	A120R	1 fixed with tray slide	A123R	1 drop-down with tray slide
6910CPB.3M-W	Wengé					A120W		A123W	
6910CPB.3M-N	Black					A120N		A123N	
6910CPB.3M-RAL	RAL					A120RAL		A123RAL	
6910CPB.4M-R	Oak	CUPBOARD	4x1/1	2400W	161x68x144 h	A120R	1 fixed with tray slide	A124R	1 drop-down with tray slide
6910CPB.4M-W	Wengé					A120W		A124W	
6910CPB.4M-N	Black					A120N		A124N	
6910CPB.4M-RAL	RAL					A120RAL		A124RAL	
6910CPB.5M-R	Oak	CUPBOARD	5x1/1	3000W	193x68x144 h	A120R	1 fixed with tray slide	A125R	1 drop-down with tray slide
6910CPB.5M-W	Wengé					A120W		A125W	
6910CPB.5M-N	Black					A120N		A125N	
6910CPB.5M-RAL	RAL					A120RAL		A125RAL	
6910CPB.6M-R	Oak	CUPBOARD	6x1/1	3600W	226x68x144 h	A120R	1 fixed with tray slide	A126R	1 drop-down with tray slide
6910CPB.6M-W	Wengé					A120W		A126W	
6910CPB.6M-N	Black					A120N		A126N	
6910CPB.6M-RAL	RAL					A120RAL		A126RAL	

OPTIONAL ITEMS AND ACCESSORIES SUITABLE FOR BOTH VERSIONS

Optional	Description	GN	Suitable for
A142	Front drop-down stainless steel rodded tray slide	2x1/1	
A143		3x1/1	
A144		4x1/1	
A145		5x1/1	
A146		6x1/1	
Optional	Description	Suitable for	
A152	Mains supply 380V		All articles
A154	Water loading from net, drain tap and overflow		
T200	Mobile plug 2P+E-6h/250V - 16 A - IP67 (IEC 309) - for powers up to 3450W		
Accessories	Description	Suitable for	
A10	1/1 GN Flat	All articles	
A20	1/1 GN Perforated		

MIXED HOT/COLD SELF-SERVICE BUFFET TROLLEYS - FIXED SNEEZE GUARD - LED LIGHTING

- Stainless steel overhead gantry with led lighting
- Fixed plexiglass sneeze guard
- Plywood panels, shelf (and doors in the cupboard version)
- AISI 304 stainless steel legs, brushed finish
- For BLACK finish: structure in water-repellent MDF with transparent coating
- AISI 304 stainless steel 19 cm-deep well for up to 15 cm-deep GN pans (not included)
- Bain-marie drain tap for the heated part and condensate drip tray inside the compressor compartment for the refrigerated part (with tap available on request)
- Bain-marie heating with heating element outside the well (heated wells)
- Static refrigeration +4°C +10°C (cold wells)
- Control panel with digital thermostat-thermometer and ON/OFF switch with warning light
- Mains supply: 230V, 50 Hz (60 Hz, upon request) single-phase
- 3m long coiled cable, Schuko plug
- Swivel castors ø 12.5 cm, 2 with brake

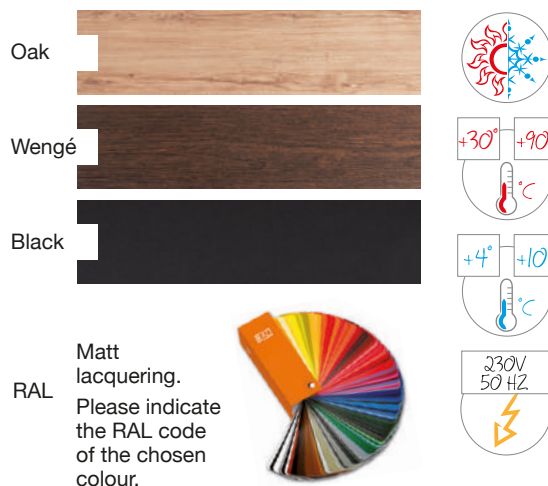

Art. 6920.6F3-W + A126W(x2) + A20(x6)

Optional Gastronorms: see pp. 122-123

OPEN LOWER PART VERSION

Article	Finish	Typology	GN compartments	Power	Max dim. cm	Optional	Lateral shelf	Optional	Front shelf
6920.4F2-R	Oak	OPEN LOWER PART	2 hot + 2 cold	1400W	161x68x144 h	A120R	1 fixed with tray slide	A124R	1 drop-down with tray slide
6920.4F2-W	Wengé					A120W		A124W	
6920.4F2-N	Black					A120N		A124N	
6920.4F2-RAL	RAL					A120RAL		A124RAL	
6920.5F2-R	Oak	OPEN LOWER PART	3 hot + 2 cold	1700W	193x68x144 h	A120R	1 fixed with tray slide	A125R	1 drop-down with tray slide
6920.5F2-W	Wengé					A120W		A125W	
6920.5F2-N	Black					A120N		A125N	
6920.5F2-RAL	RAL					A120RAL		A125RAL	
6920.5F3-R	Oak	OPEN LOWER PART	2 hot + 3 cold	1560W	193x68x144 h	A120R	1 fixed with tray slide	A125R	1 drop-down with tray slide
6920.5F3-W	Wengé					A120W		A125W	
6920.5F3-N	Black					A120N		A125N	
6920.5F3-RAL	RAL					A120RAL		A125RAL	
6920.6F3-R	Oak	OPEN LOWER PART	3 hot + 3 cold	1860W	226x68x144 h	A120R	1 fixed with tray slide	A126R	1 drop-down with tray slide
6920.6F3-W	Wengé					A120W		A126W	
6920.6F3-N	Black					A120N		A126N	
6920.6F3-RAL	RAL					A120RAL		A126RAL	

Note: when ordering one single front shelf, it is mounted on the opposite side to the operator one, unless otherwise specified.

MIXED HOT/COLD SELF-SERVICE BUFFET TROLLEYS - FIXED SNEEZE GUARD - LED LIGHTING



Art. 6920CPB.6F3-W + A126W(x2) + A20(x6)



CUPBOARD VERSION: with back panel, side panels and doors

Note: when ordering one single front shelf, it is mounted on the opposite side to the operator one, unless otherwise specified.

Article	Finish	Typology	GN compartments	Power	Max dim. cm	Optional	Lateral shelf	Optional	Front shelf
6920CPB.4F2-R	Oak	CUPBOARD	2 hot + 2 cold	1400W	161x68x144 h	A120R	1 fixed with tray slide	A124R	1 drop-down with tray slide
6920CPB.4F2-W	Wengé					A120W		A124W	
6920CPB.4F2-N	Black					A120N		A124N	
6920CPB.4F2-RAL	RAL					A120RAL		A124RAL	
6920CPB.5F2-R	Oak	CUPBOARD	3 hot + 2 cold	1700W	193x68x144 h	A120R	1 fixed with tray slide	A125R	1 drop-down with tray slide
6920CPB.5F2-W	Wengé					A120W		A125W	
6920CPB.5F2-N	Black					A120N		A125N	
6920CPB.5F2-RAL	RAL					A120RAL		A125RAL	
6920CPB.5F3-R	Oak	CUPBOARD	2 hot + 3 cold	1560W	193x68x144 h	A120R	1 fixed with tray slide	A125R	1 drop-down with tray slide
6920CPB.5F3-W	Wengé					A120W		A125W	
6920CPB.5F3-N	Black					A120N		A125N	
6920CPB.5F3-RAL	RAL					A120RAL		A125RAL	
6920CPB.6F3-R	Oak	CUPBOARD	3 hot + 3 cold	1860W	226x68x144 h	A120R	1 fixed with tray slide	A126R	1 drop-down with tray slide
6920CPB.6F3-W	Wengé					A120W		A126W	
6920CPB.6F3-N	Black					A120N		A126N	
6920CPB.6F3-RAL	RAL					A120RAL		A126RAL	

OPTIONAL ITEMS AND ACCESSORIES SUITABLE FOR BOTH VERSIONS

Optional	Description	GN
A144	Front drop-down stainless steel rodded tray slide	4x1/1
A145		5x1/1
A146		6x1/1

Optional	Description	Suitable for
A156	Drain tap (necessary for fish displaying)	All articles

Accessories	Description	Suitable for
A10	1/1 GN Flat	All articles
A20	1/1 GN Perforated	

MIXED HOT/COLD SELF-SERVICE BUFFET TROLLEYS - ADJUSTABLE SNEEZE GUARD - LED LIGHTING

- Stainless steel overhead gantry with led lighting
- Height-adjustable tempered glass sneeze guard
- Plywood panels, shelf (and doors in the cupboard version)
- AISI 304 stainless steel legs, brushed finish
- For BLACK finish: structure in water-repellent MDF with transparent coating
- AISI 304 stainless steel 19 cm-deep well for up to 15 cm-deep GN pans (not included)
- Bain-marie drain tap for the heated part and condensate drip tray inside the compressor compartment for the

- refrigerated part (with tap available on request)
- Bain-marie heating with heating element outside the well (heated wells)
- Static refrigeration +4°C +10°C (cold wells)
- Control panel with digital thermostat-thermometer and ON/OFF switch with warning light
- Mains supply: 230V, 50 Hz (60 Hz upon request), single-phase
- 3m long coiled cable, Schuko plug
- Swivel castors ø 12.5 cm, 2 with brake

Oak

Wengé

Black

RAL

Matt lacquering.
Please indicate the RAL code of the chosen colour.



ADJUSTABLE SNEEZE GUARD

Optional Gastronorms: see pp. 122-123

Art. 6920.6F3M-W + A126W(x2) + pans

OPEN LOWER PART VERSION

Article	Finish	Typology	GN compartments	Power	Max dim. cm	Optional			
						Optional	Lateral shelf	Optional	Front shelf
6920.4F2M-R	Oak	OPEN LOWER PART	2 hot + 2 cold	1400W	161x68x144 h	A120R	1 fixed with tray slide	A124R	1 drop-down with tray slide
6920.4F2M-W	Wengé					A120W		A124W	
6920.4F2M-N	Black					A120N		A124N	
6920.4F2M-RAL	RAL					A120RAL		A124RAL	
6920.5F2M-R	Oak	OPEN LOWER PART	3 hot + 2 cold	1700W	193x68x144 h	A120R	1 fixed with tray slide	A125R	1 drop-down with tray slide
6920.5F2M-W	Wengé					A120W		A125W	
6920.5F2M-N	Black					A120N		A125N	
6920.5F2M-RAL	RAL					A120RAL		A125RAL	
6920.5F3M-R	Oak	OPEN LOWER PART	2 hot + 3 cold	1560W	193x68x144 h	A120R	1 fixed with tray slide	A125R	1 drop-down with tray slide
6920.5F3M-W	Wengé					A120W		A125W	
6920.5F3M-N	Black					A120N		A125N	
6920.5F3M-RAL	RAL					A120RAL		A125RAL	
6920.6F3M-R	Oak	OPEN LOWER PART	3 hot + 3 cold	1860W	226x68x144 h	A120R	1 fixed with tray slide	A126R	1 drop-down with tray slide
6920.6F3M-W	Wengé					A120W		A126W	
6920.6F3M-N	Black					A120N		A126N	
6920.6F3M-RAL	RAL					A120RAL		A126RAL	

Note: when ordering one single front shelf, it is mounted on the opposite side to the operator one, unless otherwise specified.



Art. 6920CPB.6F3M-W + A126W(x2) + pans



CUPBOARD VERSION: with back panel, side panels and doors

Note: when ordering one single front shelf, it is mounted on the opposite side to the operator one, unless otherwise specified.




Article	Finish	Typology	GN compartments	Power	Max dim. cm	Optional	Lateral shelf	Optional	Front shelf
6920CPB.4F2M-R	Oak	CUPBOARD	2 hot + 2 cold	1400W	161x68x144 h	A120R	1 fixed with tray slide	A124R	1 drop-down with tray slide
6920CPB.4F2M-W	Wengé					A120W		A124W	
6920CPB.4F2M-N	Black					A120N		A124N	
6920CPB.4F2M-RAL	RAL					A120RAL		A124RAL	
6920CPB.5F2M-R	Oak	CUPBOARD	3 hot + 2 cold	1700W	193x68x144 h	A120R	1 fixed with tray slide	A125R	1 drop-down with tray slide
6920CPB.5F2M-W	Wengé					A120W		A125W	
6920CPB.5F2M-N	Black					A120N		A125N	
6920CPB.5F2M-RAL	RAL					A120RAL		A125RAL	
6920CPB.5F3M-R	Oak	CUPBOARD	2 hot + 3 cold	1560W	193x68x144 h	A120R	1 fixed with tray slide	A125R	1 drop-down with tray slide
6920CPB.5F3M-W	Wengé					A120W		A125W	
6920CPB.5F3M-N	Black					A120N		A125N	
6920CPB.5F3M-RAL	RAL					A120RAL		A125RAL	
6920CPB.6F3M-R	Oak	CUPBOARD	3 hot + 3 cold	1860W	226x68x144 h	A120R	1 fixed with tray slide	A126R	1 drop-down with tray slide
6920CPB.6F3M-W	Wengé					A120W		A126W	
6920CPB.6F3M-N	Black					A120N		A126N	
6920CPB.6F3M-RAL	RAL					A120RAL		A126RAL	

OPTIONAL ITEMS AND ACCESSORIES SUITABLE FOR BOTH VERSIONS

Optional	Description	GN
A144	1 Front drop-down stainless steel rodded tray slide	4x1/1
A145		5x1/1
A146		6x1/1


Optional	Description	Suitable for
A156	Drain tap (necessary for fish displaying)	All articles

Accessories	Description	Suitable for
A10	2 1/1 GN Flat	All articles
A20	3 1/1 GN Perforated	

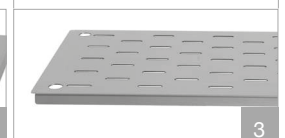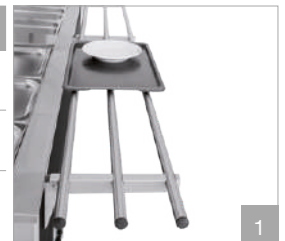

REFRIGERATED DROP-IN WITH SNEEZE GUARD

- AISI 304 stainless steel overhead gantry with fixed plexiglass sneeze guard or height-adjustable in tempered glass, led lighting
- AISI 304 stainless steel 19 cm-deep well for up to 15 cm-deep GN pans (not included)
- Drain at the base of well and condensate drip tray or external drain with tap (optional)
- Control panel with digital thermostat-thermometer and ON/OFF switch with warning light
- Mains supply: 230V, single-phase - 50 Hz (60 Hz upon request)
- Static refrigeration +4°C +10°C
- 3m long spiral cable, Schuko plug




Optional Gastronorms: see pp. 122-123



Article	GN	Sneeze guard	Lighting	Power	Max dim. cm
6980.2	2x1/1	Fixed	Led	200W	80x68x111 h
6980.3	3x1/1			360W	113x68x111 h
6980.4	4x1/1			550W	161x68x111 h
6980.5	5x1/1			480W	193x68x111 h
6980.6	6x1/1			690W	226x68x111 h
6980.2M	2x1/1	Adjustable	Led	200W	80x68x111 h
6980.3M	3x1/1			360W	113x68x111 h
6980.4M	4x1/1			550W	161x68x111 h
6980.5M	5x1/1			480W	193x68x111 h
6980.6M	6x1/1			690W	226x68x111 h

Optional		Description	Suitable for
A156	-	Drain tap	All articles
A10	1	1/1 GN flat	
A20	2	1/1 GN perforated	

- AISI 304 stainless steel 19 cm-deep well for up to 15 cm-deep GN pans (not included)
- Drain at the base of well and condensate drip tray or external drain with tap (optional)
- Control panel with digital thermostat-thermometer and ON/OFF switch with warning light
- Mains supply: 230V, single-phase - 50/50 Hz (60 Hz upon request)
- Static refrigeration +4°C +10°C
- 3m long spiral cable, Schuko plug




Optional Gastronorms: see pp. 122-123



Art. 6980.4B + A20(x4)

Article	GN	Description	Power	Max dim. cm
6980.2B	2x1/1	Well only	190W	80x68x55 h
6980.3B	3x1/1		350W	113x68x55 h
6980.4B	4x1/1		450W	161x68x55 h
6980.5B	5x1/1		460W	193x68x55 h
6980.6B	6x1/1		460W	226x68x55 h

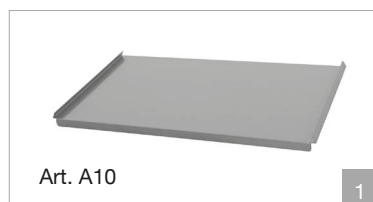


Optional		Description	Suitable for
A156	-	Drain tap	All articles
A10	1	1/1 GN flat	
A20	2	1/1 GN perforated	

HEATED DROP-IN WITH SNEEZE GUARD

- AISI 304 stainless steel overhead gantry, with fixed plexiglass sneeze guard or height-adjustable in tempered glass
- Led lighting or heating set of infrared lamps with red light (white light on request)
- AISI 304 stainless steel 19 cm-deep well for up to 15 cm-deep GN pans (not included)
- Drain at base (optional water loading from net and overflow)
- Bain-marie heating with heating element outside the well

- Control panel with digital thermostat-thermometer and ON/OFF switch with warning light
- Mains supply: 230V, - 50/60 Hz, single-phase (optional 380V three-phase)
- 3m long spiral cable, Schuko plug. For powers equal to or greater than 3000W, the cable is supplied free without plug.



Optional Gastronorms: see pp. 122-123




Art. 6990.4 + A20(x4)

Article	GN	Sneeze guard	Lighting	Power	Max dim. cm
6990.2	2x1/1	Fixed	Led	1200W	80x68x78 h
6990.3	3x1/1			1500W	113x68x78 h
6990.4	4x1/1			2400W	161x68x78 h
6990.5	5x1/1			3000W	193x68x78 h
6990.6	6x1/1			3600W	226x68x78 h
6990.2M	2x1/1			Adjustable	Led
6990.3M	3x1/1	1500W	113x68x78 h		
6990.4M	4x1/1	2400W	161x68x78 h		
6990.5M	5x1/1	3000W	193x68x78 h		
6990.6M	6x1/1	3600W	226x68x78 h		
6990.2L	2x1/1	Fixed	Infrared		
6990.3L	3x1/1			2250W	113x68x78 h
6990.4L	4x1/1			3400W	161x68x78 h
6990.5L	5x1/1			4250W	193x68x78 h
6990.6L	6x1/1			5100W	226x68x78 h

Optional		Description	Suitable for
A152	-	Mains supply 380V	All articles
A154	-	Water loading from net, drain tap and overflow	
A10	1	GN 1/1 flat	
A20	2	GN 1/1 perforated	
LB	-	White lamps	6990.2L - 6990.3L - 6990.4L 6990.5L - 6990.6L
T200		Mobile plug 2P+E-6h/250V - 16 A - IP67 (IEC 309) for powers up to 3450W	

- AISI 304 stainless steel well 19 cm deep for GN containers up to 15 cm high (excluded)
- Bain-marie water drain (optional water supply from the mains and overflow)
- Bain-marie heating with heating element outside the well
- Control panel with digital thermostat-thermometer and ON/OFF switch with

- warning light
- Mains supply: 230V, - 50/60 Hz, single-phase (optional 380V three-phase)
- 3m long spiral cable, Schuko plug. For powers equal to or greater than 3000W, the cable is supplied free without plug.





Optional Gastronorms: see pp. 122-123



Art. 6990.4B + A20(x4)

Article	GN	Description	Power	Max dim. cm
6990.2B	2x1/1	Well only	1200W	80x68x22 h
6990.3B	3x1/1		1500W	113x68x22 h
6990.4B	4x1/1		2400W	161x68x22 h
6990.5B	5x1/1		3000W	193x68x22 h
6990.6B	6x1/1		3600W	226x68x22 h

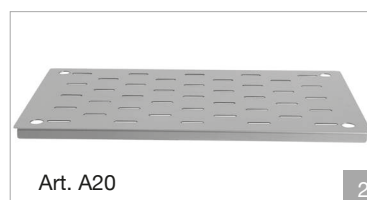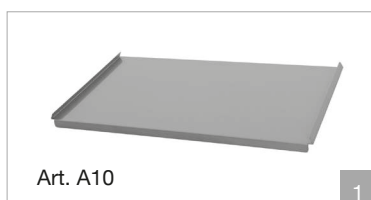

Optional	Image	Description	Suitable for
A152	-	Mains supply 380V	All articles
A154	-	Water loading from net, drain tap and overflow	
A10	1	GN 1/1 flat	
A20	2	GN 1/1 perforated	
T200		Mobile plug 2P+E-6h/250V - 16 A - IP67 (IEC 309) for powers up to 3450W	